AA121TH11 Mitsubishi 12.1" TFT-LCD screen 1280*800 Display

Brand Mitsubishi Category MITSUBISHI Screen Size 12.1 inches Resolution 1280 (RGB) × 800 (WXGA) Brightness (Typical) 1000 cd/m² Contrast Ratio (Typical) 1000:1 Viewing Angle (L/R/U/D) 85°/85°/85° (IPS) Backlight Type & Life WLED, 100,000 hours (Typ.) Operating Temperature -30°C to +80°C	Model	AA121TH11
Screen Size 12.1 inches Resolution 1280 (RGB) × 800 (WXGA) Brightness (Typical) 1000 cd/m² Contrast Ratio (Typical) 1000:1 Viewing Angle (L/R/U/D) 85°/85°/85° (IPS) Backlight Type & Life WLED, 100,000 hours (Typ.)	Brand	Mitsubishi
Resolution1280 (RGB) × 800 (WXGA)Brightness (Typical)1000 cd/m²Contrast Ratio (Typical)1000:1Viewing Angle (L/R/U/D)85°/85°/85°/85° (IPS)Backlight Type & LifeWLED, 100,000 hours (Typ.)	Category	MITSUBISHI
Brightness (Typical) 1000 cd/m² Contrast Ratio (Typical) 1000:1 Viewing Angle (L/R/U/D) 85°/85°/85° (IPS) Backlight Type & Life WLED, 100,000 hours (Typ.)	Screen Size	12.1 inches
Contrast Ratio (Typical) Viewing Angle (L/R/U/D) 85°/85°/85°/85° (IPS) Backlight Type & Life WLED, 100,000 hours (Typ.)	Resolution	1280 (RGB) × 800 (WXGA)
Viewing Angle (L/R/U/D) 85°/85°/85° (IPS) Backlight Type & Life WLED, 100,000 hours (Typ.)	Brightness (Typical)	1000 cd/m ²
Backlight Type & Life WLED, 100,000 hours (Typ.)	Contrast Ratio (Typical)	1000:1
	Viewing Angle (L/R/U/D)	85°/85°/85° (IPS)
Operating Temperature -30°C to +80°C	Backlight Type & Life	WLED, 100,000 hours (Typ.)
	Operating Temperature	-30°C to +80°C
Module Dimensions (W×H×D) $283.0 \times 185.1 \times \sim 9.7-10.2 \text{ mm}$	Module Dimensions (WxHxD)	283.0 × 185.1 × ~9.7-10.2 mm
Weight 580 g (Typical)	Weight	580 g (Typical)
Supply Voltage (Logic) 3.3 V (Typical)	Supply Voltage (Logic)	3.3 V (Typical)

Note:

Invshop recommends that you inquire with the original factory or its agents about the latest production status and technical information about AA121TH11. The product parameters displayed on Invshop are entered by Invshop engineers according to the specifications, and efforts have been made to minimize errors, but we cannot guarantee the complete correctness of the parameters. Please refer to the specification sheet!


https://www.invshop.com



https://www.invshop.com



https://www.invshop.com

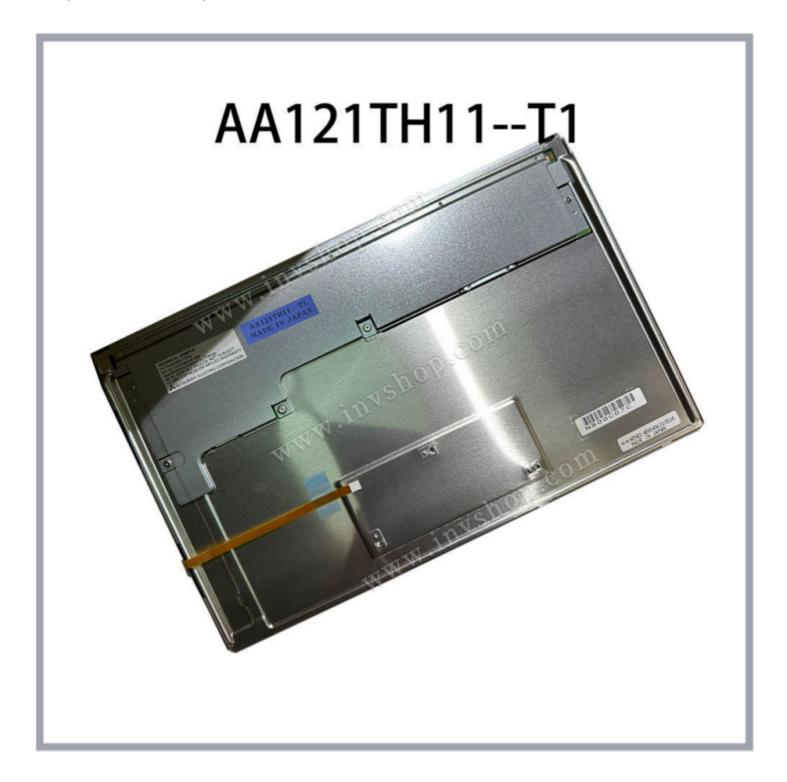

https://www.invshop.com