


M014A REV.A LCD display PANEL

Model	M014A REV.A
Category	Industrial LCD display
Wireless Standard	Bluetooth 5.2 Low Energy (BLE)
Core Chipset	High-performance, low-power MCU with integrated RF
TX Power	Configurable, up to +8 dBm
RX Sensitivity	-97 dBm (typical)
Power Supply	1.8V - 3.6V DC
Operating Current	< 5 mA in sleep mode; < 10 mA during active RX
Interface	UART, SPI, I2C, GPIOs
Security	Hardware encryption, secure boot
Operating Temperature	-40°C to +85°C
Dimensions	15.0 mm x 10.5 mm x 2.0 mm (compact SMD form factor)

Note:

Invshop recommends that you inquire with the original factory or its agents about the latest production status and technical information about M014A REV.A. The product parameters displayed on Invshop are entered by Invshop engineers according to the specifications, and efforts have been made to minimize errors, but we cannot guarantee the complete correctness of the parameters. Please refer to the specification sheet!

<https://www.invshop.com>

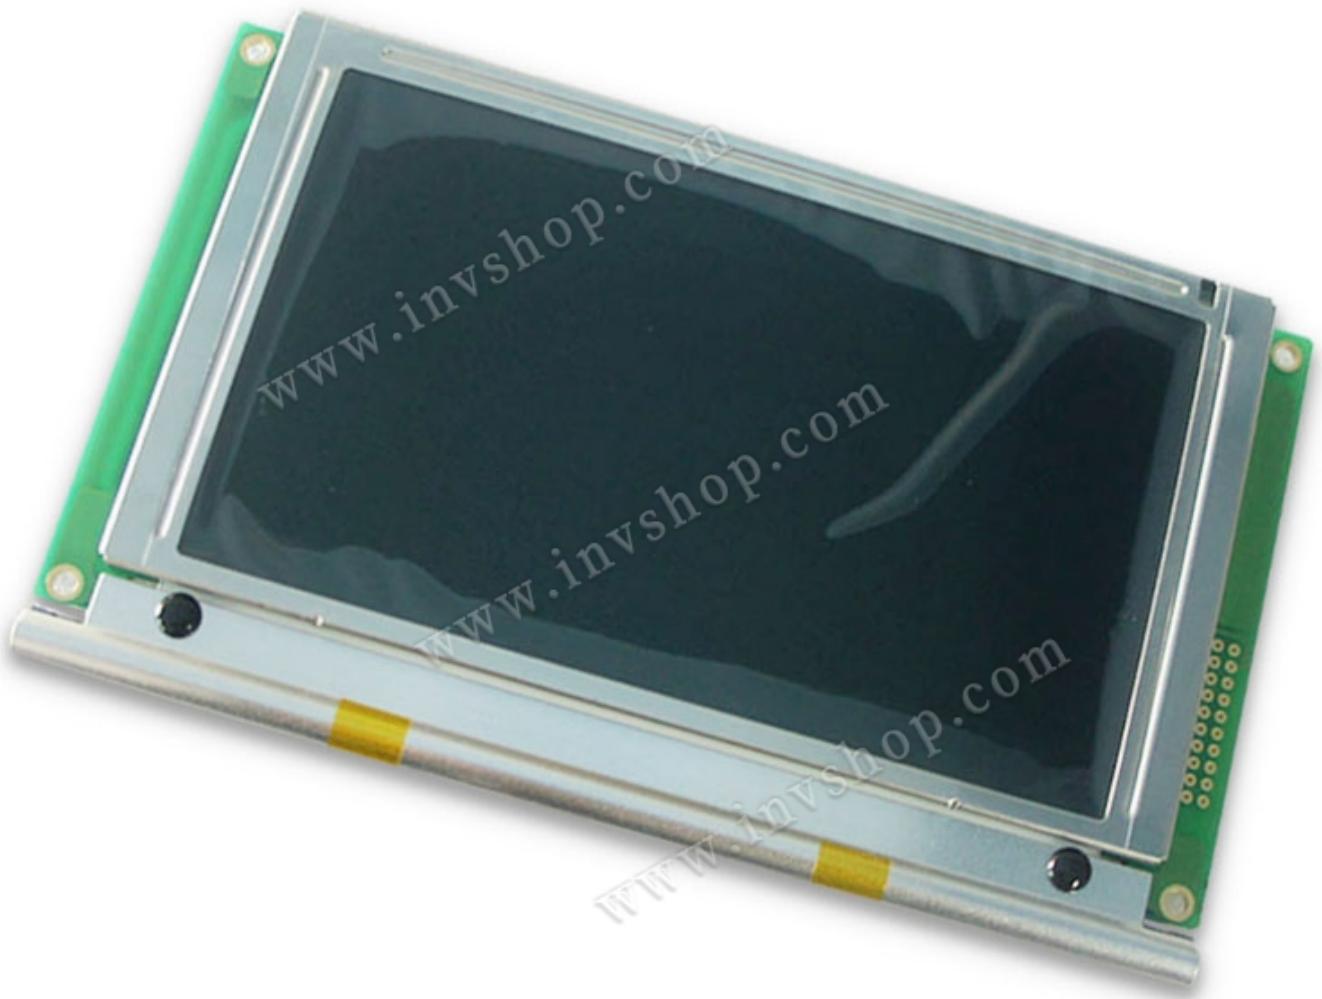

<https://www.invshop.com>